





Front	Alignment	Rear
4.7	Ride Height	4.9
1.5	Camber	1.5
4	Caster	N/A
N/A	Rear Hub Toe	0
-1	Toe (Total)	3
0	Hex Spacing	0
1	Wheelbase	1
1	Steering Rack Ball & Shims	N/A
B	Steering Block Position	N/A
2	Steering Block Ball & Shims	N/A

Notes: steering arms & blocks upside down, double joint front

Suspension Geometry

Shock Position	2/B
Camber Link Position	2A
Inner Ball & Shims	1mm
Outer Ball & Shims	2mm
Outer Arm Mount Insert	1 dot
Outer Mount Shims	0.5mm
Inner Arm Mount Insert	1 dot
Inner Mount Shims	0.5mm
Drop	5
Anti-Roll Bar	white

Notes:

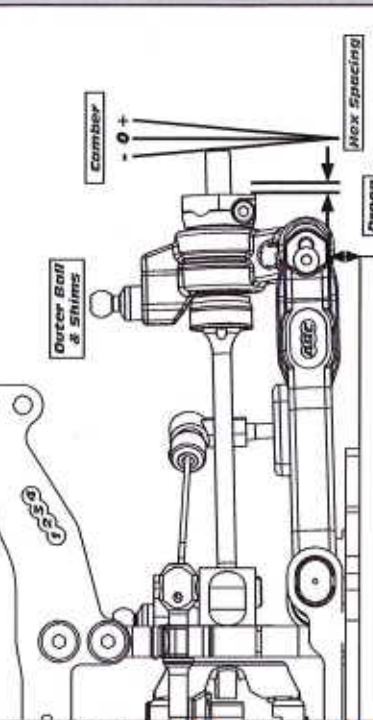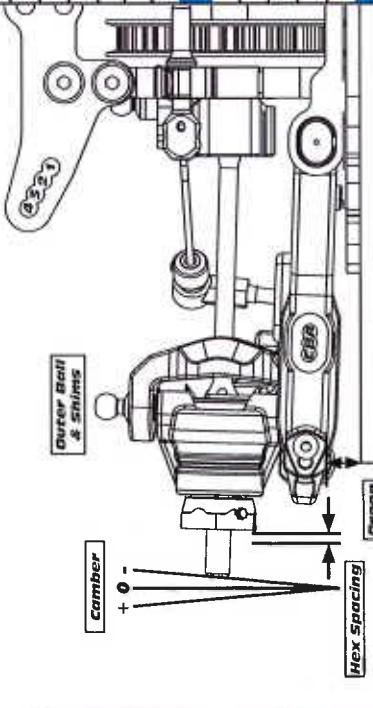

Shocks	Oil	40
3-hole	Piston	3-hole
5%	Rebound	5%
pink	Spring	blue

Notes: TRF shocks, Yokomo springs

Differentials	Type	gear
Setting	3000 cSt	
Cam Position	mid-low	
Belt Tension Number	8	





Notes:



Tires	Type	Volante V3 28R
Tire Diameter		Volante V3 28R
Insert & Wheel		
Additive & Amount	preglued	

Notes:

LRP / 15-20 min.	LRP / 15-20 min.
------------------	------------------

Notes:	Reedy Sonic Mach 2 6.5
Motor	33
Gearing	112
Notes:	gearing 7,9 64dp
Chassis:	std
Top Plate:	std
Notes:	

Arm Mount Inserts			
			
-3 DOT	1 DOT	2 DOT	3 DOT
Negative to the inside of vehicle.			
Positive to the outside of vehicle.			

Wheel Base Shims	
	
1mm	2mm

Transmitter		Speed Control	
Turning Circle:		E.S.C. Type:	
Steering Expo:		E.S.C. Settings:	
Brake E.P.:		Software Version:	
Throttle Expo:		Notes:	

Notes:		std		Body & Wing	
Notes:		PF Mazda Speed 6 LW		Notes:	
Pin Sheet 11					